

# Rubber Sleeves / AirBoy / Air Cylinders



## The standard for label printing


Rubber sleeves have been successfully used for many years for label printing and have been proven of value for the established printing processes.

### Full surface and endless printing

Sleeves with a special rubber coating are used when full surface inking, coating and laminating for label and film material are necessary.

The standard sleeves are available from stock for the gear sizes Z88 and Z96 1/8" c.p. The sleeves can be positioned in any width on the carrier cylinder.

You will receive the assembling aid **AirBoy** as well as the required **Air Cylinders** at Spilker all from one source.

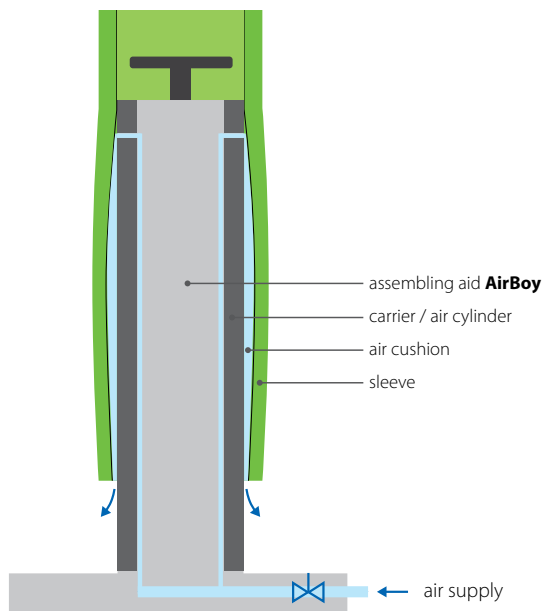

The sleeves will be brought via air cushion to the required place on the carrier sleeve and are fixed independently as soon as the air supply is interrupted.

## Constantly available standard sizes at Spilker

More sizes on request

Ø air cylinder	outer Ø sleeve	gear teeth 1/8" c.p.	sleeve width
70.14 mm	88.94 mm	88 / 96	200-1000 mm
76.51 mm	97.02 mm	96	200-1000 mm

### Your advantages

- Easy uptake mounting and positioning
- Variable working width
- Standard sizes are always available
- Comprehensive consultation concerning a machine conversion to sleeve technology
- All components are delivered out of one hand
- Short delivery times